


# LOCUS MAP

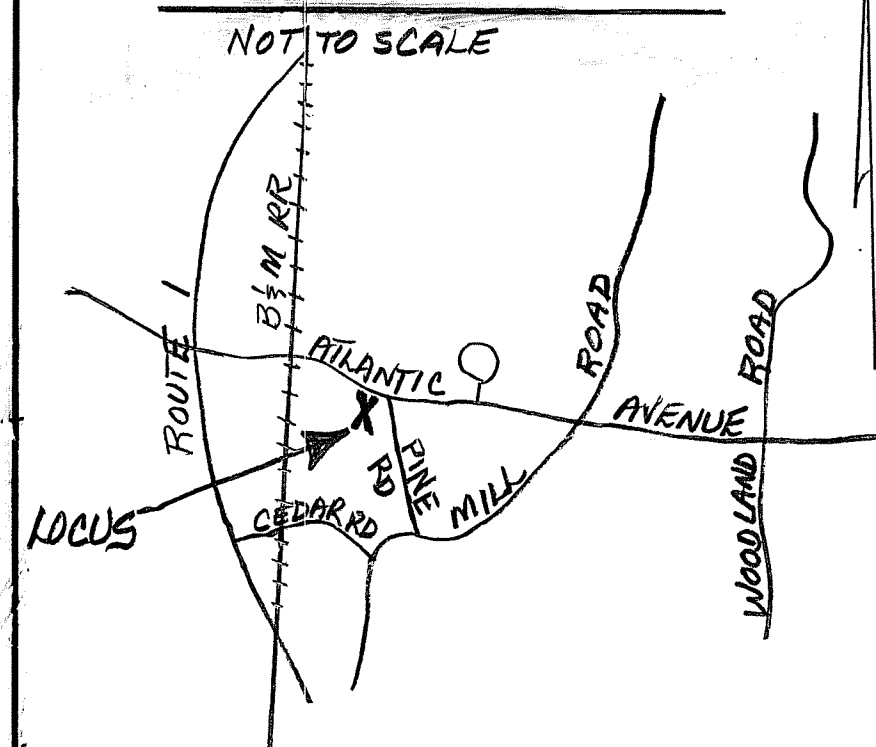

SOIL CLASS: **40B** CHATFIELD CANTON  
(SOURCE: USDA-SCS SOIL SURVEY)

BENCH MARKS: DATUM = ASSUMED

- #1 SET PK EL 50.00
- #2 SET NAIL 15" MAPLE EL 46.66
- #3 COR TOP CONC STEP EL 50.91

DESIGN INTENT: BED BOTTOM TO BE PLACED NO LOWER THAN 14" BELOW EXISTING GRADE. UPSLOPE SIDE (EXIS GRADE = 47.5) EQUALS 8" BELOW GRADE @ EL 47.0 - 69% OF BED AREA SUITABLE REPLACEMENT AREA: DOWNSLOPE

LEGEND:  
EXISTING CONTOUR  
PROPOSED CONTOUR  
EXISTING SPOT ELEVATION  
PROPOSED SPOT ELEVATION

- NOTES:
- THIS PLAN IS NOT TO BE CONSTRUED AS A BOUNDARY SURVEY. PROPERTY LINES SHOWN ARE APPROXIMATED BASED ON INFORMATION FROM THE FOLLOWING SOURCE: RCRD 2452-217, RCRD 554092, RCRD 544007.
  - NHDES-WS&PCD SUBDIVISION APPROVAL NUMBER: N/A LOT OF RECORD
  - THIS SYSTEM IS NOT DESIGNED TO HANDLE GARBAGE DISPOSAL WASTE.
  - NO SURFACE WATER OR WELL WITHIN 75' OF PROPOSED SYSTEM.
  - COMPONENTS OF EXIS FAILED SYSTEM TO BE CRUSHED & FILLED.
  - INTERIOR PLUMBING MUST BE REROUTED TO PROPOSED INVERT.

## PLOT PLAN

1"=APPROX

